

70 MHz Bandpass SAW Filter


BP60230

8 MHz Bandwidth



Complies with Directive 2002/95/EC (RoHS Compliant)

Specifications					
Parameter	Sym	Minimum	Typical	Maximum	Unit
Center Frequency at 25°C	f_c	69.90	70	70.10	MHz
Insertion Loss at f_c	IL	-	22.5	24.0	dB
1 dB Bandwidth	BW_1	7.5	7.6	-	MHz
3 dB Bandwidth	BW_3	8.0	8.25	-	MHz
40dB Bandwidth	BW_{40}	-	10.16	10.4	MHz
Passband Variation	-	-	0.6	1.0	dB
Phase Linearity	-	-	3.0	4.0	Deg
Group Delay Variation	-	-	50	60	nsec
Absolute Delay	-	-	1.9	-	μsec
Ultimate Rejection	-	50	55	-	dB
Substrate Material	-	-	YZ-LiNbO ₃	-	-
Ambient Temperature	T_a	-	25	-	°C

Typical Performance

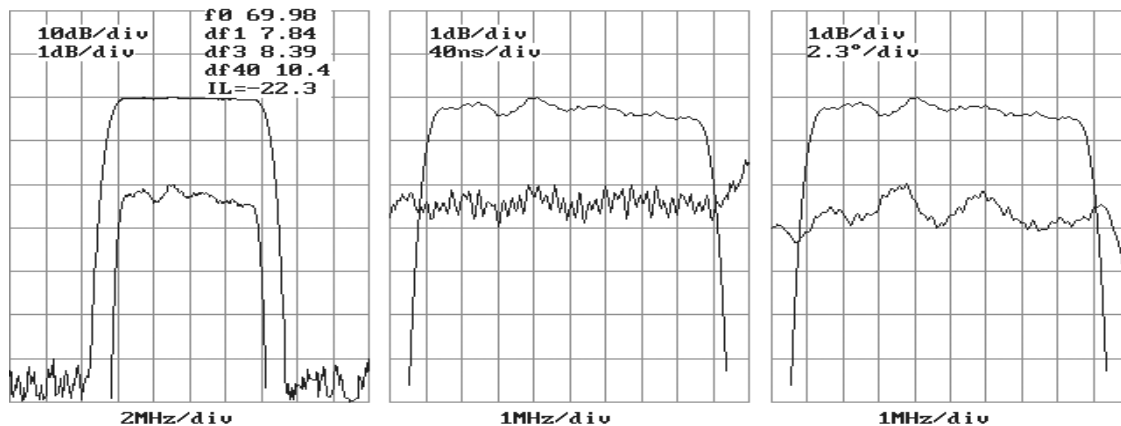

Package Outline
Matching Configuration

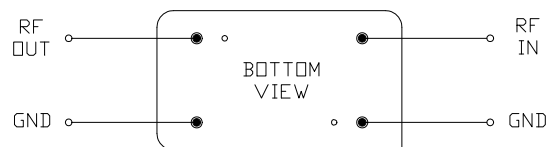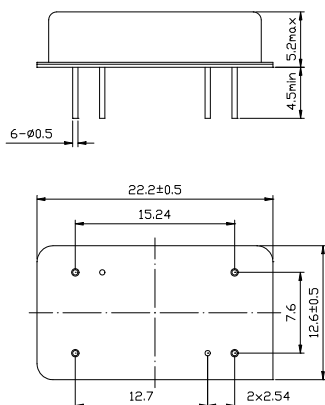

No Matching Required
 Nominal Source/Load Impedance : 50 Ω

Note: Component values may change depending on board layout.