

- **Designed to Cordless Telephone Selectivity in 926.25 MHz**
- **Low-Loss, Coupled-Resonator Quartz Design**
- **Simple External Impedance Matching**
- **Ultra Miniature Ceramic DCC6 SMD Package**

SF5011

Absolute Maximum Rating (Ta=25°C)		
Parameter	Rating	Unit
Input Power Level	P_{in}	10
DC Voltage VDC Between Any Two Pins	V_{DC}	12
Operating Temperature Range	T_A	-10 ~ +60
Storage Temperature Range	T_{stg}	-40 ~ +85


Electronic Characteristics					
Parameter	Sym	Minimum	Typical	Maximum	Unit
Nominal Frequency (at 25°C) (Center frequency between 3dB point)	f_c	NS	926.25	NS	MHz
Insertion Loss at $f_c \pm 2.0$ MHz	IL	-	4.0	5.5	dB
Passband	BW	-	± 2.0	-	MHz
Amplitude Ripple (p-p) within $f_c \pm 2.0$ MHz	$\Delta\alpha$	-	1.0	2.0	dB
Absolute Attenuation					
826.25 ... 901.25 MHz	α_{rel}	32	40	-	dB
946.25 ... 981.25 MHz		25	35	-	dB
981.25 ... 1026.25 MHz		35	45	-	dB
Frequency Aging Absolute Value during the First Year	$ fA $	-	-	10	ppm/yr
DC Insulation Resistance Between any Two Pins	-	1.0	-	-	M Ω
Input / Output Impedance (nominal)	-	-	50	-	Ω

NS = Not Specified

Notes:

1. The frequency f_c is defined as the midpoint between the 3dB frequencies.
2. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50 Ω test system with VSWR \leq 1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f_c . Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.
3. Unless noted otherwise, specifications apply over the entire specified operating temperature range.
4. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
5. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
6. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
7. For questions on technology, prices and delivery please contact our sales offices or e-mail sales@vanlong.com.

Package Dimensions (DCC6)

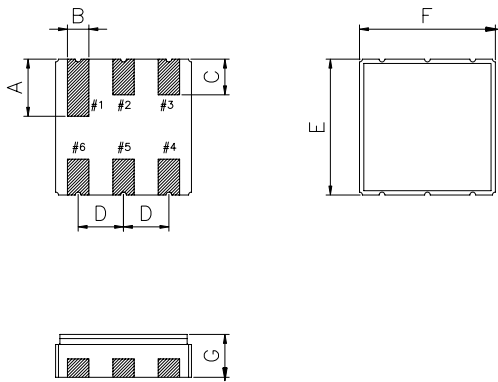

Electrical Connections

Terminals	Connection
2	Input
5	Output
1,3,4,6	Ground

Package Dimensions


Dimensions	Nom (mm)	Dimensions	Nom (mm)
A	1.90	E	3.80
B	0.64	F	3.80
C	1.00	G	1.20
D	1.27		

Marking



1. F5011 - Part Code
2. Frequency (MHz) in 6 digits
3. Date Code:
 Y : Last digit of year
 WW : Week No.

Test Circuit

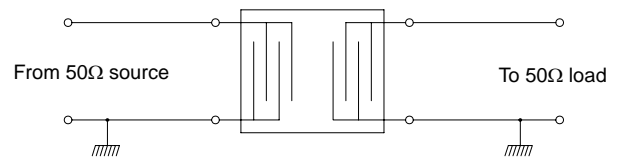

Typical Frequency Response

