


140 MHz Bandpass SAW Filter

12 MHz Bandwidth



BP62160

Electrical Characteristics					
Parameter	Sym	Minimum	Typical	Maximum	Unit
Center Frequency at 25°C	fc	139.8	140	140.2	MHz
Insertion Loss at fc	IL	-	22.2	25.0	dB
1dB Bandwidth	BW ₁	11.10	11.46	-	MHz
3 dB Bandwidth	BW ₃	12.0	12.18	-	MHz
40dB Bandwidth	BW ₄₀	-	14.69	15.0	MHz
Passband Variation	-	-	0.60	0.75	dB
Ultimate Rejection	-	50	55	-	dB
Substrate Material	-	-	YZ-LiNbO ₃	-	-
Ambient Temperature	Ta	-	25	-	°C
Operatable Temperature Range	To	-45	-	85	°C

Typical Performance

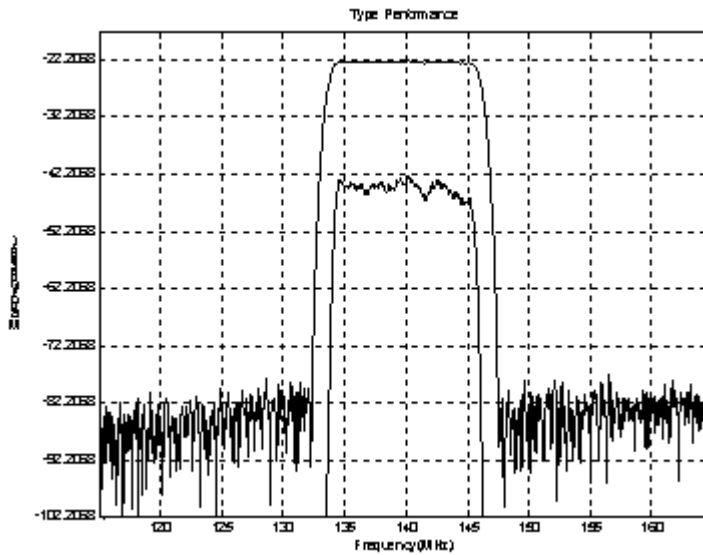

Package Outline **Matching Configuration**

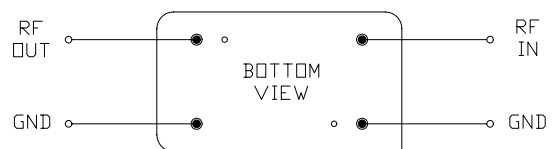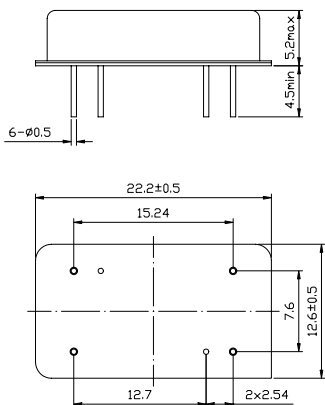

No Matching Required
Nominal Source/Load Impedance : 50 Ω