

- **Designed to GPS Applications Selectivity in 1575.42 MHz**
- **Very Low-Loss, High-Attenuation Design**
- **Simple External Impedance Matching**
- **Ultra Miniature Ceramic DCC6C SMD Package**
- **Complies with Directive 2002/95/EC (RoHS Compliant)**

SF5015

Absolute Maximum Rating (Ta=25°C)		
Parameter	Rating	Unit
Input Power Level	P_{in}	10
DC Voltage VDC Between Any Two Pins	V_{dc}	0
Operating Temperature Range	T_A	-40 ~ +95
Storage Temperature Range	T_{stg}	-40 ~ +105
ESD HBM	V_{ESD}	250


Electronic Characteristics					
Parameter	Sym	Minimum	Typical	Maximum	Unit
Nominal Frequency (at 25°C) (Center frequency between 3dB point)	f_c	-	1575.42	-	MHz
Insertion Loss 1574.22 ... 1576.62 MHz	IL	-	1.6	3.5	dB
Amplitude Ripple 1574.22 ... 1576.62 MHz	$\Delta\alpha$	-	0.3	1.5	dB
Absolute Attenuation					
1475.42 MHz	α_{rel}	40	48	-	dB
1535.42 MHz		30	38	-	dB
1615.42 MHz		50	66	-	dB
1675.42 MHz		45	54	-	dB
V.S.W.R. 1574.22 ... 1576.62 MHz	-	-	-	2.0	dB
Frequency Aging Absolute Value during the First Year	$ fA $	-	-	10	ppm/yr
DC Insulation Resistance Between any Two Pins	-	1.0	-	-	MΩ
Input / Output Impedance (nominal)	-	-	50	-	Ω

Rev. 1 – Change the operating and storage temperature range, add ESD HBM.

Notes:

1. The frequency f_c is defined as the midpoint between the 3dB frequencies.
2. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50Ω test system with VSWR ≤ 1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f_c . Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.
3. Unless noted otherwise, specifications apply over the entire specified operating temperature range.
4. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
5. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
6. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
7. For questions on technology, prices and delivery please contact our sales offices or e-mail sales@vanlong.com.

Package Dimensions (DCC6C)

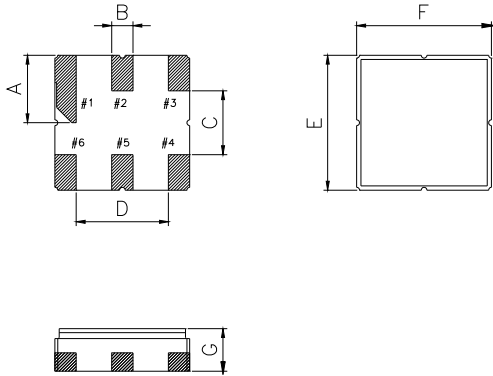


Electrical Connections

Terminals	Connection
2	Input
5	Output
1,3,4,6	Case Ground

Package Dimensions


Dimensions	Nom (mm)	Dimensions	Nom (mm)
A	1.5	E	3.0
B	0.6	F	3.0
C	1.5	G	1.1
D	1.8		

Marking




- 1. SF5015 - Part Code
- 2. Date Code:
 Y : Last digit of year
 WW : Week No.

Test Circuit

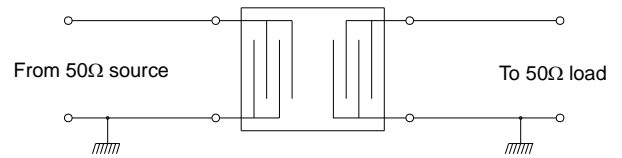

Typical Frequency Response

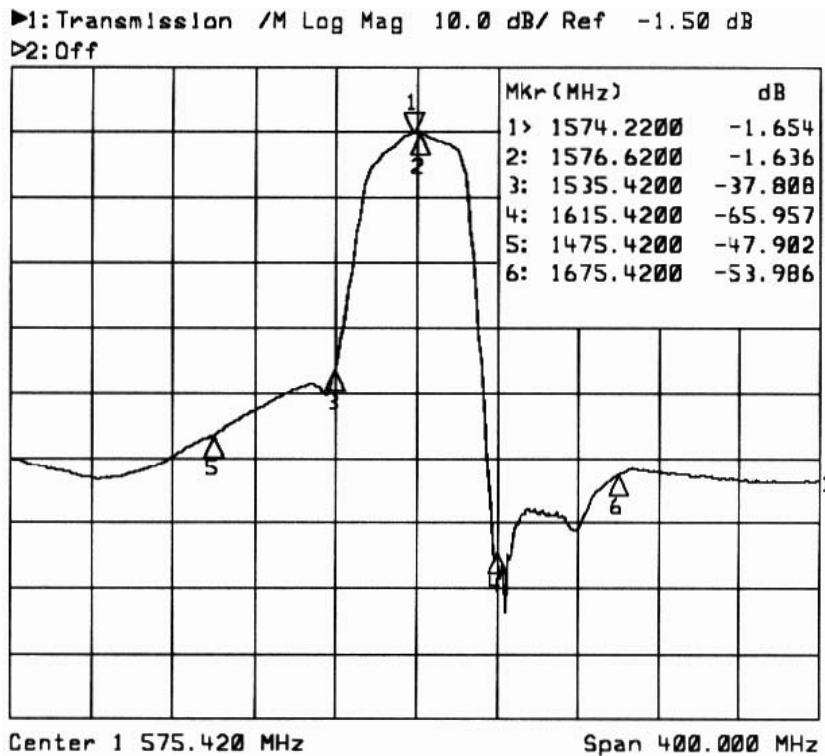

Environmental Characteristics		
Item	Condition of Test	Requirements
Random Drop	The Filter shall be measured after 3 times random drops from the height of 30cm on concrete floor.	No visible damage and the measured values shall remain the Electronic Characteristics after tests.
Vibration	The Filter shall be measured after being applied vibration of amplitude of 1.5mm with 10Hz \pm 55Hz bands of vibration frequency to each of 3 perpendicular directions for 1 hour.	
Lead Pulling Test	A weight of 3kg is pulled towards an axis of each terminal for 10 seconds.	
Lead bending Test	Lead shall be subject to withstand against 90 bending at its stem. This operation shall be done toward both directions.	
Resistance to Soldering Heat	Lead terminals are immersed up to 1.5mm from the Filter's body in solder bath of 270°C \pm 10°C for 10 \pm 1 seconds, and then the Filter shall be measured after being placed in natural condition for 2 hour.	
Solderability	Lead terminals are immersed in resin for 5 seconds and then immersed in soldering bath of 270°C \pm 10°C for 2 \pm 0.5 seconds.	
High Temperature Storage	After being placed in a chamber with +85°C \pm 2°C for 96 \pm 4 hours and then being placed in natural condition for 2 hour. The Filter shall be measured.	
Low Temperature Storage	After being placed in a chamber with -40°C \pm 2°C for 96 \pm 4 hours and then being placed in natural condition for 2 hour. The Filter shall be measured.	
Humidity	After being placed in a chamber with 90 to 95% R.H. at +40°C \pm 2°C for 96 \pm 4 hours and then being placed in natural condition for 2 hour. The Filter shall be measured.	
Heat Shock	After being kept at room temperature, the Filter shall be placed at temperature of -40°C for 30 minutes, and then the Filter shall be immediately placed at temperature of 85°C, after 30 minutes at temperature of 85°C, the Filter shall be returned to -40°C again. After 5 times above cycles, the Filter shall be returned to room temperature, after 2 hour in natural condition, the Filter shall be measured.	

